



## USER GUIDE

### CELLULAR TRAIL CAMERA

#### Models:

LINK-3G

LINK-4G

LINK-4GV

& comparable\*

 [support.spypoint.com](https://support.spypoint.com)

 1-888-779-7646

 [service@spypoint.com](mailto:service@spypoint.com)

**v1.3**

\* Specs and features may differ across comparable models.  
Refer to website or packaging for full details.



## THANK YOU FOR CHOOSING A SPYPOINT PRODUCT.

This manual will guide you through all the features of your device so that you will get optimal use out of your SPYPOINT product. Our priority is to provide outstanding customer service. If you need support for your product, please contact the SPYPOINT technical support or visit our website.

## CONTACT

 1-888-779-7646

 tech@spypoint.com

 www.spypoint.com

## ABOUT US



GG Telecom's mission is to offer products that are easy to use, innovative, affordable and of exceptional quality. Our SPYPOINT products are mainly used for hunting and residential/commercial surveillance. They are distributed and shipped all over the world and the market never stops growing. Prosperous and respected, GG Telecom is a company that constantly keeps abreast of new technologies and listens to its customers to deliver cutting-edge products with practical solutions that improve hunting and outdoor activities.

## JOIN THE SPYPOINT COMMUNITY



facebook.com/SPYPOINT



twitter.com/SPYPOINTcamera



youtube.com/SPYPOINTtrailcam

Available for all SPYPOINT trail cameras models, this incredible tool for hunters enable you to manage all your cameras & photos.



## Online camera & photo management system

Create your **FREE** START-UP account!

- ✓ **AUTOMATICALLY SORT YOUR PHOTOS**  
Drag & drop your photos to sort them by date.
- ✓ **ACCESS YOUR PHOTOS**  
from anywhere & never worry about backups or storage space.
- ✓ **SHARE YOUR PHOTOS**  
with your hunting partners, friends & family.
- ✓ **GEOTAG YOUR TRAIL CAMERAS**  
Locate your cameras faster & never misplace them in the woods again.
- ✓ **TAKE CONTROL OF YOUR CELLULAR CAMERAS**  
Change settings, get status updates, notifications & GPS location (compatible models only).




# Table of contents



<b>Components</b> .....	<b>4</b>
<b>Specifications</b>	
LINK-3G .....	<b>6</b>
LINK-4G .....	<b>7</b>
LINK-4GV .....	<b>8</b>
<b>Power</b> .....	<b>9</b>
<b>Memory card &amp; Busy LED</b> .....	<b>10</b>
<b>Settings</b> .....	<b>11</b>
<b>SPYPOINT LINK App</b> .....	<b>15</b>
<b>Installation &amp; Mounting bracket</b> .....	<b>16</b>
<b>File transfer to a computer</b> .....	<b>17</b>
<b>Available accessories</b> .....	<b>18</b>
<b>Troubleshooting</b> .....	<b>19</b>
<b>Warranty &amp; Repair</b> .....	<b>21</b>
<b>Regulation</b> .....	<b>22</b>

# Components

# LINK

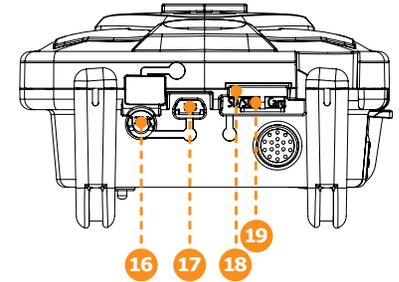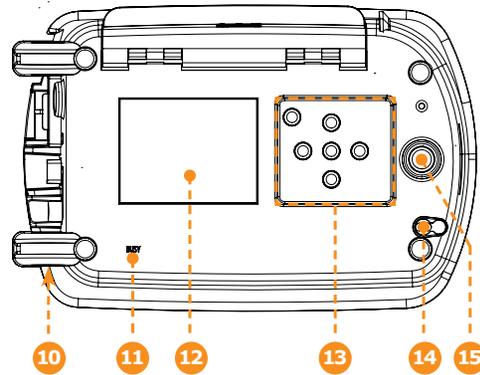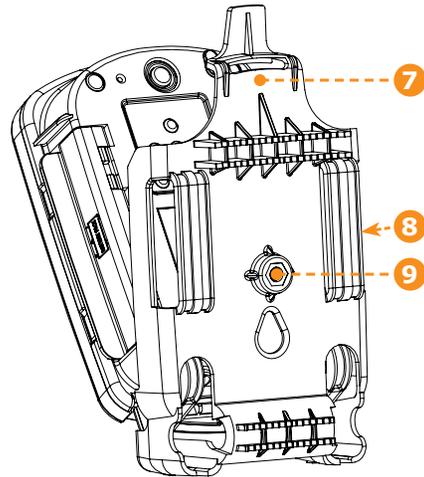

- 1 Photo lens
- 2 LEDs
- 3 Test light
- 4 Light sensor
- 5 Battery case
- 6 Fresnel lens

- 7 Mounting bracket
- 8 Slot for installation strap
- 9 Tripod mount

- 10 Cable lock hole
- 11 BUSY LED
- 12 Viewing screen
- 13 Navigation buttons
- 14 Microphone  
(Except LINK-3G)
- 15 Power button

- 16 12V/Solar panel jack
- 17 USB port
- 18 SD card slot
- 19 Micro SIM card slot  
(Except LINK-4GV)

# Components



<b>1</b>	Photo lens	Image sensor and infrared filter.
<b>2</b>	LEDs	Night lighting to obtain black and white photos and videos.
<b>3</b>	Test light	Flashes in TEST mode when there is detection and flashes 60 seconds in PHOTO/VIDEO mode to allow the user to leave without being photographed or recorded.
<b>4</b>	Light sensor	Allows the lighting of the LEDs panel at night.
<b>5</b>	Battery case	Case for AA batteries or a rechargeable lithium battery pack.
<b>6</b>	Fresnel lens	Expands the detection area and increases the sensitivity of the camera's motion sensor.
<b>7</b>	Mounting bracket	Removable support to install the camera.
<b>8</b>	Slot for installation strap	Allows the user to install the camera using the installation strap included.
<b>9</b>	Tripod mount	Standard ¼-20" tripod mount.
<b>10</b>	Cable lock hole	Allows the user to install a CL-6FT cable lock, sold separately.
<b>11</b>	BUSY LED	Lights up either when there's a motion detected or when the camera sync with the SPYPOINT LINK app.
<b>12</b>	Viewing screen	Allows the user to access the main menu and view photos/videos.

<b>13</b>	Navigation buttons	Buttons to set the camera.
<b>14</b>	Microphone (Except LINK-3G)	Records sound in video mode.
<b>15</b>	Power button	Press the button to turn on or off the camera.
<b>16</b>	12V power jack  Solar panel jack	This camera can be powered from an external 12-volt DC input such as a 12V battery or a 12V adapter, each sold separately.  Allows the user to connect a solar panel (SP-12V) to maintain the charge of the lithium battery pack (LIT-09/LIT-C-8), sold separately.
<b>17</b>	USB port	To transfer photos/videos to a computer.
<b>18</b>	SD card slot	An SD card is required to record photos/videos.
<b>19</b>	Micro SIM card slot (Except LINK-4GV)	A SIM card is required for cellular functions.

## LINK-3G

### Photo recording

Photo resolution	11 MP
File format	JPG
Time lapse mode	Predefined intervals from 30 s to 1 h
Multi-shot mode	Up to 6 photos per detection
Info on photos	Date, time, temperature (°C/°F) and moon phase
Capture mode	Color by day, black and white by night

### Video recording

Video resolution	1280 x 720 (HD 720p)
File format	AVI
Sequence length	Adjustable from 10 to 90 s
Capture mode	Color by day, black and white by night

### Audio

Sound recording	N/A
-----------------	-----

### Memory storage

Support	<ul style="list-style-type: none"> <li>Internal memory: none</li> <li>External memory: SD/SDHC card (up to 32 GB)</li> </ul>
---------	--

### Viewing

Built-in screen	2.4" LCD
Computer output	USB 2.0

### Power source

Alkaline or lithium batteries	6 x AA
Lithium battery pack	Rechargeable battery pack (LIT-09/LIT-C-8)
External (12V jack)	12V battery (KIT6V-12V, KIT-12V, BATT-12V) or 12V adapter (AD-12V)
Solar panel	Solar panel (SP-12V) combined with rechargeable battery pack (LIT-09/LIT-C-8)

### Detection system

Motion sensor	PIR
Detection angle	40°
Detection range	Adjustable from 5 to 100 ft
Trigger speed	0.07 sec
Delay between each detection	Adjustable from Instant to 30 min

### Night time illumination system

LEDs	62 LEDs
Type	Super low glow LEDs
Flash range	< 100 ft
Exposure	Automatic infrared level adjustment

### Optical field of view

40°

### Dimensions

4.3" W X 6.8" H X 3" D

### Cellular transmission

Network	3G
Photo transmission	Wireless photo transmission to the free, SPYPOINT LINK App with a SPYPOINT plan. For more information, please visit the link below.  <b>WWW.SPYPOINT.COM/PLANS</b>
Configuration of the camera	Fully configurable remotely through the free SPYPOINT LINK App.

### Recommendations

Operating temperature	(-30 °C to + 50 °C) (-22 °F to +122 °F)
Storage temperature	(-40 °C to + 60 °C) (-40 °F to +140 °F)

## LINK-4G

<b>Photo recording</b>	
Photo resolution	12 MP
File format	JPG
Time lapse mode	Predefined intervals from 30 s to 1 h
Multi-shot mode	Up to 6 photos per detection
Info on photos	Date, time, temperature (°C/°F) and moon phase
Capture mode	Color by day, black and white by night
<b>Video recording</b>	
Video resolution	1280 x 720 (HD 720p)
File format	AVI
Sequence length	Adjustable from 10 to 90 s
Capture mode	Color by day, black and white by night
<b>Audio</b>	
Sound recording (automatically recorded in video mode when rubber cap is removed)	Mono
<b>Memory storage</b>	
Support	<ul style="list-style-type: none"> <li>•Internal memory: none</li> <li>•External memory: SD/SDHC card (up to 32 GB)</li> </ul>
<b>Viewing</b>	
Built-in screen	2.4" LCD
Computer output	USB 2.0
<b>Power source</b>	
Alkaline or lithium batteries	6 x AA
Lithium battery pack	Rechargeable battery pack (LIT-09/LIT-C-8)
External (12V jack)	12V battery (KIT6V-12V, KIT-12V, BATT-12V) or 12V adapter (AD-12V)
Solar panel	Solar panel (SP-12V) combined with rechargeable battery pack (LIT-09/LIT-C-8)

<b>Detection system</b>	
Motion sensor	PIR
Detection angle	40°
Detection range	Adjustable from 5 to 100 ft
Trigger speed	0.07 sec
Delay between each detection	Adjustable from Instant to 30 min
<b>Night time illumination system</b>	
LEDs	62 LEDs
Type	Super low glow LEDs
Flash range	< 100 ft
Exposure	Automatic infrared level adjustment
<b>Optical field of view</b>	
40°	
<b>Dimensions</b>	
4.3" W X 6.8" H X 3" D	
<b>Cellular transmission</b>	
Network	4G (HSPA+)
Photo transmission	Wireless photo transmission to the free, SPYPOINT LINK App with a SPYPOINT plan. For more information, please visit the link below.  <b>WWW.SPYPOINT.COM/PLANS</b>
Configuration of the camera	Fully configurable remotely through the free SPYPOINT LINK App.
<b>Recommendations</b>	
Operating temperature	(-30 °C to + 50 °C) (-22 °F to +122 °F)
Storage temperature	(-40 °C to + 60 °C) (-40 °F to +140 °F)

## LINK-4GV

### Photo recording

Photo resolution	12 MP
File format	JPG
Time lapse mode	Predefined intervals from 30 s to 1 h
Multi-shot mode	Up to 6 photos per detection
Info on photos	Date, time, temperature (°C/°F) and moon phase
Capture mode	Color by day, black and white by night

### Video recording

Video resolution	1280 x 720 (HD 720p)
File format	AVI
Sequence length	Adjustable from 10 to 90 s
Capture mode	Color by day, black and white by night

### Audio

Sound recording (automatically recorded in video mode when rubber cap is removed)	Mono
---	------

### Memory storage

Support	<ul style="list-style-type: none"> <li>•Internal memory: none</li> <li>•External memory : SD/SDHC card (up to 32 GB)</li> </ul>
---------	---

### Viewing

Built-in screen	2.4" LCD
Computer output	USB 2,0

### Power source

Alkaline or lithium batteries	6 x AA
Lithium battery pack	Rechargeable battery pack (LIT-09/LIT-C-8)
External (12V jack)	12V battery (KIT6V-12V, KIT-12V, BATT-12V) or 12V adapter (AD-12V)
Solar panel	Solar panel (SP-12V) combined with rechargeable battery pack (LIT-09/LIT-C-8)

### Detection system

Motion sensor	PIR
Detection angle	40°
Detection range	Adjustable from 5 to 100 ft
Trigger speed	0.07 sec
Delay between each detection	Adjustable from Instant to 30 min

### Night time illumination system

LEDs	62 LEDs
Type	Super low glow LEDs
Flash range	< 100 ft
Exposure	Automatic infrared level adjustment

### Optical field of view

40°

### Dimensions

4.3" W X 6.8" H X 3" D

### Cellular transmission


Network	4G (EV-DO)
Photo transmission	Wireless photo transmission to the free, SPYPOINT LINK App with a SPYPOINT plan. For more information, please visit the link below.  <b><a href="http://WWW.SPYPOINT.COM/PLANS">WWW.SPYPOINT.COM/PLANS</a></b>
Configuration of the camera	Fully configurable remotely through the free SPYPOINT LINK App.

### Recommendations

Operating temperature	(-30 °C to + 50 °C) (-22 °F to +122 °F)
Storage temperature	(-40 °C to + 60 °C) (-40 °F to +140 °F)

The battery level is shown in the bottom right corner of the screen when the camera is in TEST mode. When a single line remains, the camera will continue to take photos. However, we strongly recommend to change the AA batteries or charge the lithium battery pack before they are empty. If a video is being recorded and the battery level reaches 0%, the camera saves the file before shutting down.

## AA BATTERIES




This camera requires 6 AA batteries (1.5V). The use of alkaline or lithium batteries is strongly recommended.



To ensure maximum performance of the camera and prevent battery leak, we recommend the use of new batteries. Make sure to insert each battery with the correct polarity. (Negative or flat end against the metal spring plate) Do not mix battery type - use ALL alkaline or ALL lithium. Do not mix old and new batteries. Rechargeable AA batteries are not recommended as the lower voltage they produce can cause operational issues.


## LITHIUM BATTERY PACK



This SPYPOINT camera can be powered by a rechargeable lithium battery pack LIT-09/LIT-C-8 (sold separately). This type of battery is less affected by cold temperatures and last twice longer than an alkaline batteries.

## EXTERNAL (12V)

This camera can also be powered by an external 12-volt DC input such as a 12-volt battery (KIT-12V, BATT-12V or KIT6V/12V) or a 12-volt adapter (AD-12V), sold separately.

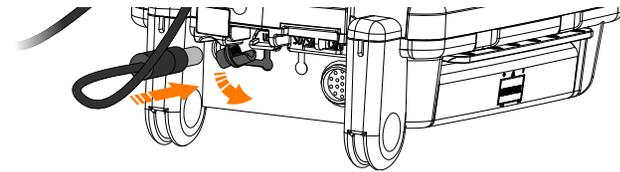

## SOLAR PANEL

This camera also offers the possibility to connect a solar panel (SP-12V sold separately) to **maintain** the charge of the lithium battery pack (sold separately). While installing the rechargeable lithium battery pack, the LIT-09 CHARGER option located in the GENERAL SETTINGS menu should be "On" to activate the charging system of the solar panel.

# Memory card / BUSY LED

## MEMORY CARD

A memory card is required to record photos and videos. The camera is compatible with SD/SDHC memory cards, up to 32 GB capacity (sold separately).

When the camera is turned on and no memory card is used, the screen displays "Insert Memory Card".


Here is a table of the approximate number of photos and length of videos that can be recorded with different memory card capacities. Many photo and video resolutions are noted, see those corresponding to the camera.

**Note:** This SPYPOINT camera is equipped with continuous file recording. When the memory card is full, the camera will continue to record photos or videos by deleting the first recorded files.

	4 GB	8 GB	16 GB	32 GB
<b>Photo</b>				
10 MP	1900	3800	7600	15200
11 MP	1700	3400	6700	13400
12 MP	1600	3200	6300	12600
<b>Video</b>				
1280 x 720	40 min	1h20	2h40	5h20

## INSERTING THE MEMORY CARD

Before inserting or removing a memory card, always turn off the camera to prevent loss or damage of the photos already recorded. Insert an SD/SDHC memory card (up to 32 GB capacity) in the card slot, gold contacts facing up. The card is inserted correctly when a click is heard.

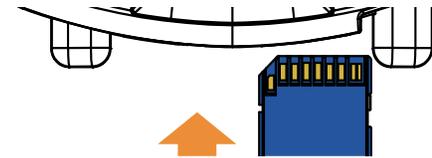

 We suggest to format your SD card if it's been in another electronic device to make sure you will have the maximum capacity of your memory card.

## REMOVING THE MEMORY CARD

Lightly press the memory card into the camera once to pop it out of the slot and remove it.

## BUSY LED

The BUSY light, located below the screen, is a diagnostic tool. It lights up when the camera starts, when the camera records a file, in DETECTION TEST mode and during photo transmission.

# Settings

Use the ↑ and ↓ buttons to navigate in the camera interface and modify the selection, the OK button to select and the ↵ button to return to the previous menu.

**START CAMERA**  
 Allows the user to start the camera in either, **PHOTO**, **VIDEO** or **TIME LAPSE** mode. When a mode is selected, the test light in front of the camera will flash for 60 seconds and a countdown will appear on the screen to allow the user to leave the area without being photographed.

**NETWORK TEST**  
 Allows the user to test the cellular network to ensure a cellular signal is available where you want to install the camera.

**DETECTION TEST**  
 Allows the user to test the detection system of the camera. When the **DETECTION TEST** mode is selected, no photo or video is recorded. Walk perpendicularly in front of the camera. When the camera detects a movement, the test light blink to indicate that normally, a photo or video would have been recorded. If the system does not detect the movement, increase the detection distance using the "Sensitivity" option in the settings menu. Realigning the camera can also be required. In **TEST** mode, it is possible to take a photo by pressing the OK button. The photo is saved and appears in the **VIEW** mode.

**VIEW**  
 Allows the user to view or delete recorded photos and videos on the camera screen.



- 1 Selected photo / total number of photos
- 2 The play icon indicates that this element is a video
- 3 The orange outline indicates which photo is selected

**Viewing with the screen of the camera:**

When the **VIEW** mode is selected, the latest photos or videos recorded appear as thumbnails on the screen. Press ▲ or ▼ to navigate this page, and press OK to view a photo in large format. To view next or previous large photo, press ▲ or ▼. Press back to return to the thumbnail view.

When a large photo in opened, press OK to view the different options available:

Play	Allows the user to play or pause the video on the screen (this option is available only for videos).
Zoom	Allows the user to zoom in or out.
Date and time	Allows the user to view the date and time printed on the photo.
Protect	Allows the user to protect a photo or video to prevent it from being deleted by selecting "Erase All".
Erase	Allows the user to erase the photo or the video seen on the screen from the memory card.
Erase all	Allows the user to erase from the memory card all stored photos and videos, with the exception of protected files.
Format	Allows the user to format the memory card and delete all protected photos and videos.
Exit	Allows the user to exit the menu and return to the viewing screen.

**SETTINGS**  
 Allows the user to the different settings on the camera. From **PHOTO**, **VIDEO**, **TIME LAPSE** or **GENERAL** settings

# Settings

# LINK



## PHOTO SETTINGS

Sets the options of the PHOTO mode.

### Recommended settings

The camera can be configured for **usage in trails**. This situation usually presents low activity level, fast subjects and a small number of photos is expected. These settings increase the chances of capturing animals that follow each other.

The camera can also be configured for **usage at a feeder's site**. This situation usually presents high activity level, slow subjects and a large number of photos is expected. These settings moderate the number of photos taken while capturing overall activity on feeder's site.

Here is a table showing the suggested settings for each situation:

	Trail	Feeder
Delay	Instant	5 min
Multi-shots	1	2-3



When these recommended settings are not adapted to the situation, battery life can be affected.

### Delay: (Instant/10s/1m/3m/5m/10m/15m/30m)

Allows the user to choose the time interval between each detection before the camera records the next photo. A longer delay minimizes the number of photos taken and maximizes the battery life. A shorter delay maximizes the number of photos taken but requires more battery power. The shorter times interval are recommended when the camera is used for security purposes.

### Multi-shot: (1/2/3/4/5/6 consecutive shots)

Takes up to 6 consecutive shots at each detection, with a 10-second delay between each photo. This option allows the user to get up to 6 photos from different angles when the camera is in PHOTO mode.



## TIME LAPSE SETTINGS

Sets the options of the TIME LAPSE mode.

### Interval: (30s/1m/3m/5m/15m/30m/1h)

Allows the camera to take photos at regular preset intervals. For example, if the option "5m" is selected in the TIME LAPSE mode, the camera takes a photo every 5 minutes even if there is no detection. This option allows the user to obtain photos of game outside the detection range of the camera.

**Note:** The TIME LAPSE mode only applies for photos, not videos. When the TIME LAPSE mode is selected, the DELAY option and the MULTI-SHOT mode are disabled.



## VIDEO SETTINGS

Sets the options of the VIDEO mode.

### Delay: (Instant/10s/1m/3m/5m/10m/15m/30m)

Allows the user to choose the time interval between each detection before the camera records the next video. A longer delay minimizes the number of videos taken and maximizes the battery life. A shorter delay maximizes the number of videos taken but requires more battery power. The shorter times interval are recommended when the camera is used for security purposes.

### Video length: (10s/30s/60s/90s)

Allows the user to select the duration of the recording when the camera is set in VIDEO mode.

### Photo first:

When this option is enabled, a photo is taken immediately before each video.

**Note:** The file name of the photo corresponds to the digit before the video file name. For example, if the name of the photo is PICT001, the name of the video will be VID002.

# Settings

# LINK



## WIRELESS SETTINGS

Sets the wireless options of the camera.

---

### Cellular: (On/Off)

Allows the user to turn ON or OFF the transmission of pictures

---

### Frequency:

Allows the user to choose the number of synchronizations that the camera performs in a day.

---

### First sync time:

Allows the user to choose at what time of the day the camera communicates for the first time.

---

### Sim options:

Allows the user to unlock the SIM card with a PUK/PIN number provided by the cellular service operator.

---

### Theft Alert: (On/Off)

Enabling this feature allows you to be alerted in case of theft. You will receive a notification and a photo immediately after movement of the device.

---

### GPS: (LINK-4G & LINK-4GV) (On/Off)

During a synchronization, this option allows the camera to send GPS coordinates to locate the camera.

---

### Provisioning (LINK-4GV only)

Allows the camera to collect the necessary information from the Verizon cellular network, and ensures that it is able to communicate with it.

---



## GENERAL SETTINGS

Sets the general options of the camera.

---

### Language: (English/Français/Deutsch)

Allows the user to select a language for the camera menus.

---

### Date format: (MM/DD/YY, DD/MM/YY)

Allows the user to set the date as Month/Day/Year or as Day/Month/Year.

---

### Time format: (12H/24H)

Allows the user to set to standard time or military time.

---

### Date:

Allows the user to set the date

---

### Time:

Allows the user to set the time

---

### Sensitivity: (Low/Medium/High)

Allow the user to choose the sensitivity of the motion sensor.

The camera will only detect sources of heat in movement. Make sure to have the least possible objects in front of the camera during the positioning. This prevents the camera of taking photos when oriented towards the sun while an object moves in front of the camera (e.g. a branches).

---

# Settings

## Quality: (Normal/High)

Allow the user to set the photo quality.

## Schedule

Allows the user to set the operation period of the camera for each day of the week. The start and stop time programmed are the hours during which the camera is in action and records photos or videos. For example, if the user selects "3:00 AM" start time and "7:00 PM" stop time on Mondays, the camera will only detect for that period of time and will stay inactive for the remaining hours. Each day has to be configured independently.

For a 24 hour activation, the start and stop time must be 12:00 AM. These hours are the basic settings of the camera.

## LIT-09 charger: (On/Off)

Allows the user to charge the LIT-09 battery pack from an external source.

- ON when:       • LIT-09 + 12V power source and/or solar panel  
OFF when:      • 6AA • LIT-09 • 12V • 6AA + 12V

## Battery type: (AA/LIT-09/12V)

Allows the user to select the battery type he is using to get a more precise battery level reading

## Info on photos: (Yes/No)

Allows the user to have date, time, temperature and moon phases printed on the photos.



## Night mode:

Allows the user to set the best option for photos.

	OPTIMAL MODE	IR-BOOST MODE	BLUR REDUCTION MODE
Battery life	★★★★★	★★★★★	★★★★★
Flash range	★★★★★	★★★★★	★★★★★
Blur reduction	★★★★★	★★★★★	★★★★★

## Temp. units: (°C/°F)

Allows the user to select the temperature display.

## About the device:

Allows the user to displays system informations

- Software version number
- Hardware version number
- Model number
- Modem version
- IMEI
- SIM
- Region


## Factory reset:

Allows the user to restore the device to its original state.

# SPYPOINT LINK app

# LINK

When you will login in the SPYPOINT LINK app, it will bring you directly to the Photos tab. From there, you will be able to see right away the latest photos received as they are sorted by date & time.

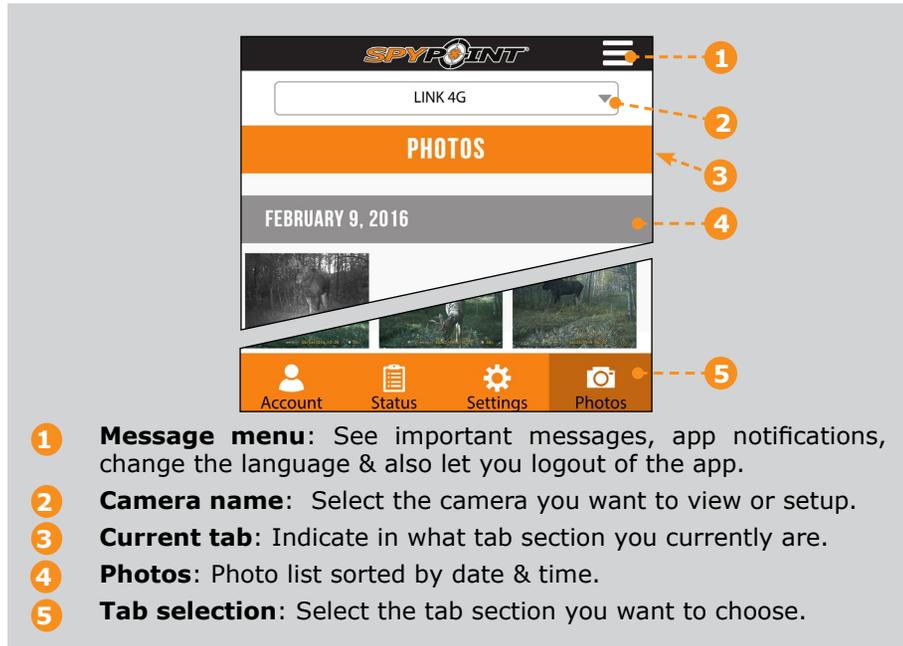

## STATUS

See general informations of the camera.

## LEVELS

See your camera Signal strength, Battery level, SD card space and your Position with your GPS Geotag. (GPS Geotag not available on the LINK-3G)

## GENERAL INFORMATION

See your camera Model, Version, Last communication, Nb of pictures this month, Temperature, Last movement and Battery type.



## SETTINGS

Modify the settings, the synchronisation frequency & others

## BASIC SETTINGS

### Mode - PHOTO

Set Delay, Multi-shot & Sensitivity.

### Mode - TIME LAPSE

Set Interval.

### Mode - VIDEO

Set Delay, Sensitivity, Photo first & Video length.

## SYNCHRONISATION SETTINGS

Set Cellular transmission, First sync time & Sync frequency.

## ADVANCED OPTIONS

Set the Date format, Temp. unit. & Night mode.



## PHOTOS

Let's you see your pictures by date, month and years. Also let's you share or download the photo.

- Scroll up or down to view your photos by date.
- Click on a photo to select it and see it larger.
  - Swipe left to see previous photo or right for the next one.
  - Click on the arrow at the top right of the screen to share the photo on facebook.
  - Swipe up or down to return to the PHOTOS tab

## WIRELESS SETUP OF THE LINK CAMERA

Note that any modifications of the settings through the app will carry over to the camera at the time of its next synch. All the settings in the App are the same one's as in the camera. If you're not sure what a setting does, please refer to the previous section.



## ACCOUNT

Select the data plan and modify your profile informations.

## DATA PLAN

Select your data plan from Annual, Annual+ or Hunting (3Months).

## MODIFY YOUR PROFILE INFORMATION

Modify your profile like Password, Name, Address, Phone number & more.

# Installation & Mounting bracket

LINK

## INSTALLATION

### Recommended installation height:

The camera should be installed at the same height as the animal's mid-body.

### Ideal installation for quality pictures & videos:

The targeted animal should be 25 feet / 7.5m away from the camera for a better field of view.

To get brighter pictures at night, you should have elements in the background to reflect back the IR flash to the camera.


Note that the camera should not directly be facing the sun to avoid back lighting and false detection.

Make sure the front of the camera is free of any obstructions. The area of installation should be cleared from branches or bushes. These could be responsible for triggering false detections when combined with heat, reflections and/or wind. Setting the sensitivity level of the camera too high can also result in false detections by unwanted movement.

## MOUNTING BRACKET


To remove the camera from the mounting bracket:

1. Push the tab to release the camera from the mounting bracket.
2. Remove the camera.




## INSTALLATION WITH THE SUPPLIED STRAP

Use the mounting bracket slot for the installation strap to fix the camera.



The dimensions of the strap (included) is 1" X 60".

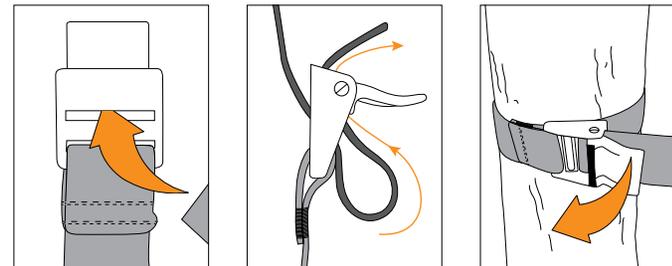

# File transfer to a computer

LINK

To transfer photos/videos to a computer:

- Turn OFF the camera.
- Remove the SD card from the camera.
- Insert the SD card into the computer slot, or use a memory card adaptor.
- The computer will detect the card and install the driver automatically.



## For a PC

Click on "My Computer" or «This PC» on your Desktop

Locate your device under "Removable Disk" and then click to access it. Then click on "DCIM" and "100DSCIM" to find all recorded photos and videos.

Select the photos you want to copy. The easiest way is to select them all by clicking on the Home tab and the Select all on the right-hand side. (You can also press Ctrl and the 'A' key, or click the Edit menu and choose select all in other versions of Windows)

Click the Copy icon on the left-hand side of the ribbon (or hold Ctrl and press C). [NOTE: If you don't want to select all photos, hold down the Ctrl key and click on the photos you do want to select before clicking the Copy icon]

Navigate to the folder in which you would like to store your images, or create a new folder by click the New Folder button in the ribbon. (You can also press Ctrl–Shift–N together to create a new folder, or right-click in some empty space in the Pictures folder and choose New, then from the next menu: Folder)

Type a name for your new folder, press Enter and then double-click on the folder to open it.

From the Home tab, choose Paste (or hold Ctrl and press V). The photos will be copied into the new folder.

## For a Mac

Click the Finder icon in the Dock.

Locate your device under the Devices tab and then click to access it. Then click on "DCIM" and "100DSCIM" to find all recorded photos and videos.

Click Edit on the toolbar running along the top of the screen and then press Select All to highlight every single images on the device. Select All is also achievable by pressing the ⌘ and A key simultaneously on your keyboard.

Alternatively, if you do not wish to import all, you can individually highlight the images you would like to transfer by holding ⌘ and clicking the file-name.

Click Edit once again and then Copy (or ⌘ and C) to copy the highlighted images.

Navigate to the folder in which you would like to store your images, or create a new folder by right-clicking and pressing CTRL simultaneously, then select New Folder from the menu.

Click Edit and then Paste (or ⌘ and V) to copy your chosen images from your device to the selected folder.

Images may take several minutes to transfer depending on the file size and the amount of images you are importing.

Once your images have transferred, click the Eject icon situated alongside the name of your device and then unplug the device from your Mac.

## Available accessories

# LINK



**Lithium battery pack & charger**  
#LIT-C-8, Rechargeable lithium battery pack and AC charger with charge indicator light. Fits all SPYPOINT cameras.



**12V DC Power cable**  
#CB-12FT, 12 ft power cable with alligator clips at one end to connect a 12V battery to a camera.



**Steel security box**  
#SB-PRO, Steel box to secure the camera against theft. It also protects it from breakage caused by bears or other animals. Fits all 62 LED SPYPOINT cameras.



**Camera mount**  
#MA-360, Adjustable mounting arm, fits all cameras that have a standard 1/4-20" tripod mount. It can rotate 360° and tilt approx +/- 90°. Also available in black.



**Rechargeable 12V battery, charger & housing kit**  
#KIT-12V, 12-volt 7.0Ah rechargeable battery with a water resistant ABS plastic case, AC charger, 12 ft power cable (#PW-12FT) and carrying strap included. Compatible with all SPYPOINT products equipped with a 12V power jack.



**12-volt Adaptor**  
#AD-12V, AC adaptor (6V to 12V). Powers the camera from an electrical outlet.



An extension cable is required to use this accessory with this product with this camera model. Contact SPYPOINT customer service for a free adaptor with a proof of purchase.



**Cable lock**  
#CL-6FT, 6 ft cable lock fits all SPYPOINT cameras.



**SD Memory card 16GB**  
#SD-16GB, SDHC UHS-1 memory card 16 GB, ultra high speed Class 10.

To obtain more information on other available accessories, go to  
[www.spypoint.com](http://www.spypoint.com)


# Troubleshooting



Problem	Possible solutions
Impossible to turn on the camera	<ul style="list-style-type: none"> <li>• Verify if there are batteries in the camera.</li> <li>• Verify if the batteries are correctly installed.</li> <li>• Replace alkaline batteries or recharge the lithium battery pack.</li> </ul>
The screen of the camera turns off	<ul style="list-style-type: none"> <li>• The camera may be set to PHOTO, TIME LAPSE or VIDEO mode and the screen turns off after a period of 60 seconds in order to preserve battery life.</li> <li>• The camera automatically resets itself to PHOTO, TIME LAPSE or VIDEO mode (depending of the latest mode used or selected) after 2 minutes of inactivity on the main menu.</li> <li>• To return to the screen, turn off the camera and turn it on again.</li> </ul>
The screen of the camera goes blank and the camera does not respond.	<ul style="list-style-type: none"> <li>• The battery level is too low. Replace alkaline batteries or recharge the lithium battery pack.</li> </ul>
The camera does not respond	<ul style="list-style-type: none"> <li>• Remove the batteries and reinstall them.</li> <li>• Replace alkaline batteries or recharge the lithium battery pack.</li> </ul>
Impossible to take photos / videos	<ul style="list-style-type: none"> <li>• Replace alkaline batteries or recharge the lithium battery pack.</li> <li>• Verify if the SD card is not locked.</li> <li>• Format the memory card</li> </ul>
Red light in front of the camera blinks	<ul style="list-style-type: none"> <li>• Camera is set in DETECTION TEST mode.</li> <li>• Camera is set in PHOTO or VIDEO mode. The red light in front of the camera flashes for 60 seconds to allow the user to leave without being photographed or recorded.</li> </ul>
The computer does not recognize the camera	<ul style="list-style-type: none"> <li>• Verify if the camera is properly connected to the computer.</li> <li>• Make sure the camera is turned on before connecting it to the computer.</li> <li>• Use the supplied USB cable.</li> </ul>

No person/animal on photos	<ul style="list-style-type: none"> <li>• Sunrise or sunset can trigger the sensor. Camera must be re-orientated.</li> <li>• At night, the motion detector may detect beyond the range of the IR illumination. Reduce sensibility setting.</li> <li>• Small animals may trigger the unit. Reduce sensibility setting and/or raise height of camera.</li> <li>• Motion detector may detect animals through foliage.</li> <li>• If a person or animal moves quickly, it may move out of the camera's field of view before the photo is taken. Move the camera further back or redirect the camera.</li> <li>• Make sure the mounting post or tree is stable and does not move.</li> </ul>
Camera take black photos / videos	<ul style="list-style-type: none"> <li>• Verify the battery level to see if battery power is full as the infrared flash will stop operating near the end of the battery life specially if you're doing a video.</li> <li>• Verify that there's something within the flash range to reflect the infrared back to the camera.</li> <li>• If you're not sure if the infrared flash is working properly, test the camera in a dark room to see if you're able to have a black &amp; white pictures or videos.</li> </ul>
Photos / videos appear dark at night	<ul style="list-style-type: none"> <li>• For best result, make sure the subject is within the ideal flash range. Subjects may appear too dark at greater distances.</li> </ul>
Photos are blurry	<ul style="list-style-type: none"> <li>• Low lighting conditions and fast moving subjects, may produce streaks on the photo, try setting the "Night mode" to "BLUR reduction" to reduce the motion blur.</li> </ul>

# Troubleshooting

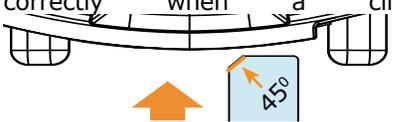Error message	Possible solutions
No image	<p>The camera does not see any pictures/videos.</p> <ul style="list-style-type: none"> <li>• Verify if the SD card is not locked.</li> <li>• Verify if the memory card contains photos/videos with a computer.</li> </ul>
Protected file	<p>The file you want to delete is protected.</p> <ul style="list-style-type: none"> <li>• Unprotect the photo in the View mode, then you will be able to delete this file.</li> <li>• Format the memory card to delete this file and all the others</li> </ul>
Insert memory card	<p>The use of a memory card is required to record photos and videos.</p>
Error: No SIM card	<p>The SIM card is missing or defective.</p> <ul style="list-style-type: none"> <li>• Turn off the camera and turn it on again</li> <li>• Remove the SIM card and insert it again. Carefully insert a micro SIM card in the micro SIM card slot ( on the component diagram), with the 45° corner first and the gold contact area facing down. The card is inserted correctly when a click is heard.</li> </ul> 
Error: SIM card	<p>The SIM card is defective.</p> <ul style="list-style-type: none"> <li>• Turn off the camera and turn it on again</li> <li>• Remove the SIM card and insert it again.</li> </ul>

Error: SIM locked	<p>Your SIM card is locked.</p> <ul style="list-style-type: none"> <li>• Contact the SPYPOINT customer service.</li> </ul>
Error: SIM locked (PUK)	<p>Your SIM card is locked and require a PUK.</p> <ul style="list-style-type: none"> <li>• Contact the SPYPOINT customer service.</li> </ul>
Error: SIM card not supported	<ul style="list-style-type: none"> <li>• The camera must use the Truphone SIM card provided with the camera.</li> </ul>
Error: SIM not activated	<p>Your SIM card is either not activated or the cell provider have refused the connection</p> <ul style="list-style-type: none"> <li>• Turn off the camera and turn it on again</li> <li>• Contact the SPYPOINT customer service.</li> </ul>
Error: No service	<p>The SIM card does not detect any signal.</p> <ul style="list-style-type: none"> <li>• Move outside or get near a window and re-run it a few times if need be to get all the informations from the cell network.</li> </ul>
Error: Modem	<p>There has been a communication problem between the camera and the modem.</p> <ul style="list-style-type: none"> <li>• Turn off the camera and turn it on again</li> </ul>

# Warranty & Repair



## LIMITED WARRANTY

This SPYPOINT product designed by GG Telecom, is covered by a one (1) year warranty on material and workmanship starting from the original date of purchase. The sales receipt is the client's proof of purchase and must be presented if warranty service is needed. This warranty will be honored in the country of purchase only.

This GG Telecom warranty does not apply: (a) to consumable parts, including but not limited to batteries, which performance is designed to decrease over the course of time; (b) to damage caused by misuse, use with another product, neglect, accidents, liquid contact, fire, earthquake or any other external cause; (c) to GG Telecom products that have been purchased online from an unauthorized dealer; (d) to products that have had any modification or tampering; (e) to cosmetic damage including but not limited to scratches and broken plastic; (f) to damage caused by operating the GG Telecom product outside of GG Telecom's recommendations.

## INSTRUCTIONS FOR REPAIR SERVICE

GG Telecom will repair the product or replace it at its discretion with an equivalent product without charge if covered by the warranty described previously. The shipping fees for an item sent will be assumed by the customer. GG Telecom will then pay for the return of the product covered by the warranty.

For a product not covered by the warranty, the repair will be subject to a reasonable charge and the customer will also assume all shipping costs.

**IMPORTANT: Under no circumstances will GG Telecom accept returned products without a RMA number. (Return Material Authorization) It is essential to contact GG Telecom before making a return.**

1. Before sending a product for repair, please contact GG Telecom technical support team at 1-888-779-7646 or tech@spypoint.com as most issues can be solved over the phone or by mail.
2. If a product needs to be sent, an RMA number will be given to authorize the return of the product and for future reference.
3. The original receipt or a copy must be sent along with the package.
4. The RMA number must be written on the outside of the package and sent to:

CANADA  
GG Telecom  
120 J.Aurèle-Roux  
Victoriaville, QC  
G6T 0N5

United States  
GG Telecom  
555 VT route 78  
Swanton, Vermont  
05488

The customer is liable for loss or damage to the product that may occur during the transport to GG Telecom. We recommend the use of a traceable method of shipping to ensure protection.

[WWW.SPYPOINT.COM](http://WWW.SPYPOINT.COM)

## FCC REGULATIONS



FCC Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the Federal Communications Commission (FCC) rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.